

MGE™ EPS™ 6000

Three phase UPS

300/375 kVA



Performance 3phase Power Protection with high adaptability to meet the unique requirements of medium to large datacenters, buildings and mission critical environment.

- > Flexible and very adaptable
- > Strong electrical features
- > Intuitive monitoring
- > Parallel capable output
- > Synchronization to external source
- > High availability architecture components



For More Information:
(866) 787-3271
Sales@PTSdcs.com

APC[®]
by Schneider Electric




 + APC
MGE = peace of mind

Customer


MGE™ EPS™ 6000 Features

Digital Power Quality Inverter

The most outstanding feature of the MGE™ EPST™ 6000 is the digital inverter. Using a unique technology called Digital Power Quality Management (DPQM), the inverter maintains precision voltage regulation under all operating conditions. The key to the superior performance lies in the speed and resolution of the waveform which is generated by up to eight pulses per millisecond allowing the waveform to be tightly controlled. The waveform is constantly compared to a real time reference sine wave. If the sine wave deviates from the reference sine wave, the gain of the inverter output is adjusted creating a "correction" pulse maintaining a "power quality envelope" that is $\pm 1\%$ of a perfect sine wave. A free switching frequency accelerates during periods of major variations for better regulation. By optimizing the switching frequency, the MGE™ EPST™ 6000 is also able to minimize switching losses and maintain a high efficiency level even at lower loads.

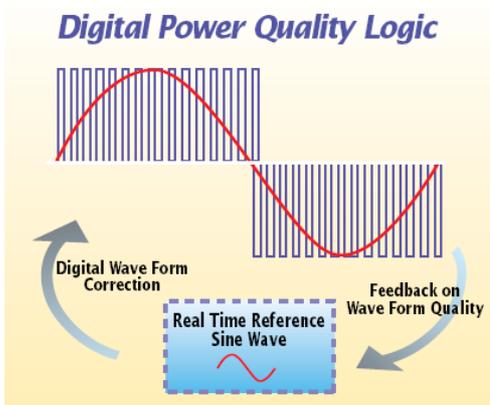


Another benefit of the high-resolution control topology is that harmonic distortion reflected from the loads is practically eliminated. The error correction pulses counteract the reflected waveform distortion reducing THD to under 7%.

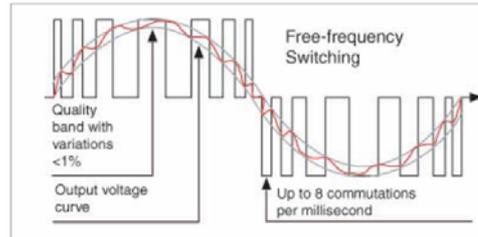

Some other UPS manufacturers claim they have PWM inverters but have simply continued to use their old SCR based inverter designs and substituted IGBT's (Insulated Gate Bipolar Transistors) into the circuit where the SCR once was used. Since these designs still switch the transistors at 60 Hz (very slow) they effectively produce a step wave and have no active sub cycle filtering capability to combat reflected harmonics and can not respond quickly to dynamic (i.e step) loads. To convert the step wave output to a sine wave the inverter output needs to be put through extensive filtering system before it can appear as a sine wave. Even after filtering, this technology still leave remnants of a step wave visible on a scope trace. The dependency on the inverter trap filtering also reduces reliability, as it is another failure risk added to the circuit.

UPS Input Filter Technology

The technology used to maintain the input power factor and avoid leading PF loads is an important consideration. Many other large UPS rely on disengaging the input filter capacitors with a contactor at lower loads where the UPS risks becoming a leading PF load. Switching capacitors will create large notches and disturbances on the utility bus. Furthermore the system is relying on a mechanical contactor. APC's system is based strictly on a solid state inductor assembly balancing the effect of the capacitors – a safe and reliable technology.

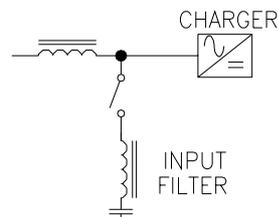

MGE™ EPST™ 6000 Features

Solid State Disc SCR Transfer Switch

APC by Schneider uses large hockey puck SCRs in its static bypass. The ability to clear faults safely is dictated by the capacity of the static bypass switch. Because these SCRs can tolerate quick fault currents over 22 times that of the UPS rating. They can safely use the fault clearing power of the utility to clear the fault without any damage to the UPS. Many other UPSs typically use lower current brick type SCRs on their static switches that are only momentary rated and rely on an overlap contactor to carry the current. Because fault current rises so quickly, it can often exceed the rating of these momentary SCRs before the contactor has a chance to engage. The fault clearing capability of the UPS is regulated by capacity of the static bypass switch. MGE™ EPST™ 6000 uses robust disc SCR static bypass switch which is able to clear instantaneous faults current over 20 times the UPS's nominal rating. MGE™ EPST™ 6000 bypass is 100% continuous duty rated making it more reliable than systems that pair smaller, momentary rated SCRs with an overlapped contactor.




Fault Tolerant

Output faults are common events on any UPS system. Even a small downstream device fault may take four or five cycles before a distribution circuit breaker opens. This means that the UPS module must be capable of clearing the fault.

The reality is that no UPS manufacturer's inverter has the capacity to clear very large faults. IGBTs (the transistors) used in the inverters simply are not designed to sustain faults. The key to managing faults is to firstly protect the inverter by current limiting it from fault conditions – and then safely make a seamless transfer to utility via the static bypass switch. The utility will have enough fault clearing capacity to clear any fault. Since the inverter is properly protected once the fault is cleared (either by opening the breaker or if it clears itself) – it can safely assume the critical again. MGE's fast current limiting avoids overloading the inverter – while the robust static bypass switch feeds enough utility power to clear the fault. The result is that the load will stay protected and the UPS will remain in tact.

Demonstrated Reliability as the Industry's Best UPS


Reliability can be expressed on paper with mathematical equations and even via standards such as MIL-217. Mathematical methods of expressing reliability are subject to the methodology, with even well recognized standards with defined methodologies differing from calculation to calculation and subject to creative interpretation. In fact, when comparing most major manufacturers reliability according to MIL-217, the results are very close. MGE prefers to measure the reliability of the MGE™ EPST™ 6000 by looking at our customers and more importantly the number of customers who continue to buy our systems. MGE™ EPST™ 6000 customers include the world's largest Internet providers, semi-conductor manufacturers, insurance and financial institutions and telecommunications companies. Many of these customers have the potential to lose more on single outage than the cost of the UPS making reliability the primary factor in selecting a UPS. Even after exhaustive independent consultant engineer investigations among all major UPS manufacturers, the MGE™ EPST™ 6000 has time and again proven to be the most reliable solution on the market. Furthermore, MGE has now supplied many of these same customers for the third time with the MGE™ EPST™ 6000 family.

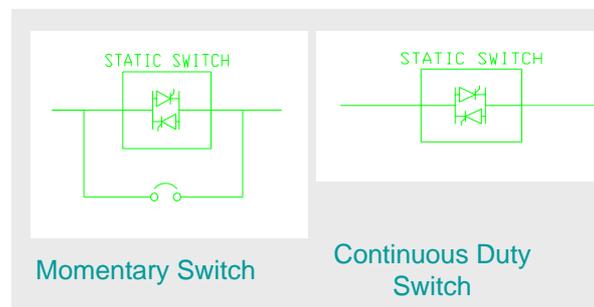

Specific Technical Advantage

Generator Compatibility/Input Filter Technology

The MGE™ EPST™ 6000 is the most generator friendly UPS thanks to its unique input filter technology. This technology eliminates one of the major reliability risks associated with large UPS systems- the failure of the generator to support the UPS under low load conditions. MGE's shunt inductor input filter technology provides a superior solution that both limits input THD and ensures that the input power factor never goes leading – at all load levels. This is achieved by using a passive shunt inductor to balance the power factor. The technology uses highly reliable passive components and does not involve any mechanical switching. The result is a very reliable filter technology that permits safe UPS/generator operation without excessive generator over sizing.

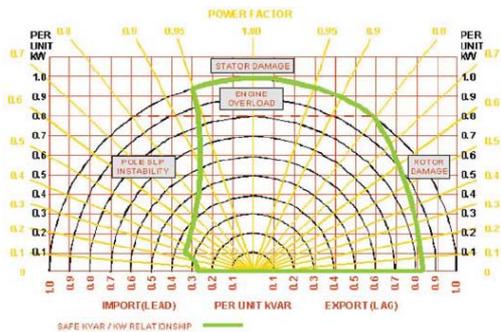


Battery Management

Batteries represent a significant investment in any UPS system – often half the cost. They are also have the highest risk of failure of any component. The MGE™ EPST™ 6000's battery management system performs two critical functions: First it collects all the relevant inputs to display the most accurate time remaining. Secondly by incorporating key details such as battery temperature, the MGE™ EPST™ 6000's rectifier continually optimizes the charge voltage to maximize battery life.

Full Output Voltage Regulation Over Entire Range of the Battery

The MGE™ EPST™ 6000 uses a 480 V DC bus. As a result of the DC bus monitoring the AC output voltage the MGE™ EPST™ 6000 is able to maintain the output voltage regulation over the whole operating range of the battery. Some UPSs that use lower DC busses (using fewer batteries in series) may experience decaying output voltage as the battery voltage / DC bus drops during discharge. This means that the MGE™ EPST™ 6000 UPS will be able to maintain perfect voltage regulation over the full range of the battery.

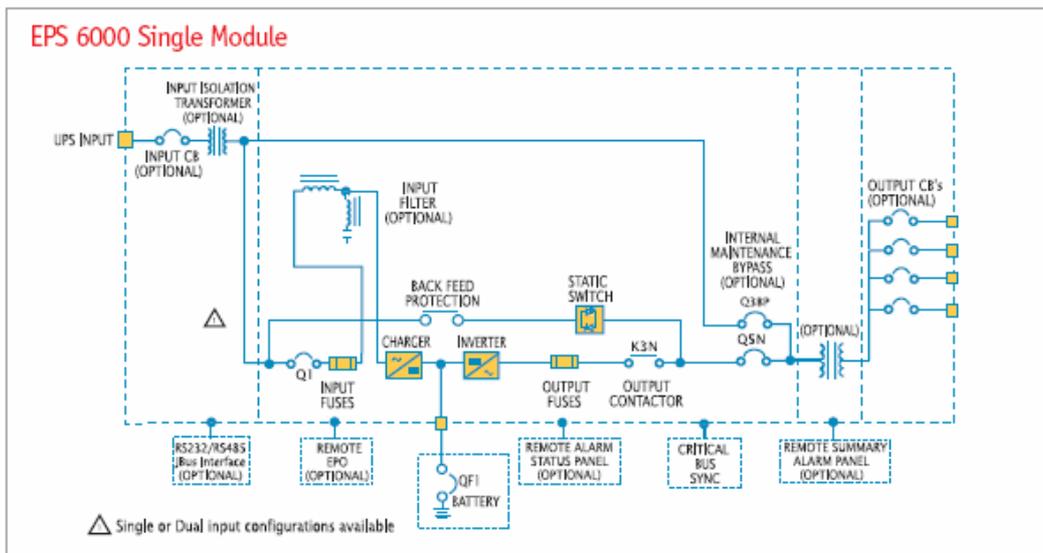


MGE™ EPS™ 6000 Options

Integrated Input Isolation Transformer

Every MGE™ EPS™ 6000 is equipped with an input isolation transformer fully integrated into the core module. Integrating the transformer directly into the module saves footprint and provides all the benefits of galvanic isolation including providing a very robust buffer between the utility and the critical load.

Graphical User Interface: (Optional)

The Advanced Graphical Interface for the MGE™ EPS™ 6000 UPS system features a 12" high contrast TFT LCD touch screen. Delivering features including animated mimic diagrams, alarm event logs, trending, component level status and more, the interface presents UPS status information in an easy to read graphical format. Guided by a clear menu, users can navigate through all screens to explore system level information on multi-module systems drilling right down to module and component level information. Operator procedures simplify the use of the UPS, contributing to an overall increase in reliability by mitigating user errors.

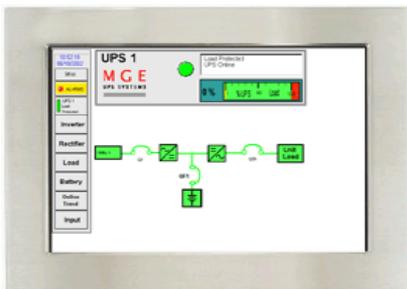

Options

- > Low kVAR input filter
- > Graphical User Interface with Network Connection
- > External Battery Disconnect
- > External Maintenance Bypass
- > Load Bank Breakers
- > Critical Bus Synchronization Module
- > Remote Alarm Status Panel (RASP)
- > Remote Summary Alarm Panel (RSAP)
- > UPS Output Distribution
- > Parallel Static Switch Cabinet (SSC)
 - Continuous Duty
 - Momentary Duty
- > Seismic Anchors
- > Top Cable Entry Cabinet
- > Battery Monitoring
- > Raised floor stands
- > Network Management Card/Web SNMP
- > Advanced Power Management Software



Seismic Certification

The MGE™ EPS™ 6000 has been certified by independent professional engineers to Seismic ZONE 4 specifications. Using the brackets supplied by APC by Schneider and fastening into the substrate as noted in the installation drawings

The most comprehensive range of services

Commissioning

Schneider Electric Critical Power and Cooling Services provides commissioning service for all new Equipment with support to meet your specific requirements.

Managing an installation calls for Upgradeability

To be sure of benefiting from the management of an installation, Schneider Electric Critical Power and Cooling Services provides solutions for upgrading:

- technical upgrading
- upgrading battery functions
- site audits, studies and analysis of the UPS environment
- harmonic audits
- upgrading the UPS function using Swap-Pac for adapting and anticipating changes in customers' requirements as well as providing environmental end of life cycle management.



Maintenance contracts

A maintenance contract on your UPS ensures a smooth running system allowing you to focus on your core business. A maintenance partnership with the company that manufactures and installs your UPS systems provides continuity and service levels no one else can meet. APC by Schneider is pleased to offer the industry's most comprehensive, efficient and cost effective maintenance programs designed in an à la carte fashion to tailor the program to your specific needs. While you can custom build a maintenance program specific to your site, APC has devised 3 basic packages that cover a majority of the needs of our customers. However, even these three packages can be customized to your precise specifications and budget. For example, additional services such as preventative maintenance visits, site inspections and remote monitoring can be added to each package so you get precisely the level of service you need.

• **ULTRA**, APC by Schneider's most complete service package, Ultimate Agreements offer 7 x 24 back-up featuring 30 minute call back time on all service requests and on site arrival within four hours of your call (not available in all areas). All parts, replacement spare parts, labor, and travel expenses associated with the call are included with Ultimate Agreements.

• **PREMIER**, For a superior level of coverage, Premier Service is available Monday through Friday, from 8:00AM - 5:00PM, local time, perfect for most businesses. This program guarantees a maximum 30-minute callback time, with on-site arrival of your APC by Schneider engineer on the next business day or sooner. All parts, replacement spare parts, labor, and travel expenses associated with visiting your site are included in this complete package.

• **SELECT**, For a moderate level of coverage, Select Service offers a discount on parts and labor associated with corrective maintenance, 30-minutes maximum callback time, and next business day or sooner on-site arrival time. Parts, labor and travel expenses associated with corrective maintenance are billed separately at discounted time and material rates.

Technical characteristics

Rated power (kVA / kW)	300/240				375/300				
Normal AC Input									
Input Voltage (V)	208	480	600	208	480	600			
Nominal Input with filter (A)	740	320	260	930	400	320			
Frequency (Hz)	60 Hz , +10%								
Power Factor	0,9 lagging 2 kVAR max leading								
Output Connection	(3ph,3/4 W + GRD)								
Output									
Output Voltage (V)	208	208	480	600	208	208	480	600	
Max Output current (A)	833	361	289	1,041	451	361			
Output Connection	(3ph,3/4 W + GRD)								
Frequency (Hz)	60 Hz , +2,0 Hz (selectable) 0.1% free running								
Power Factor	0,8								
Voltage Regulation	+ 0,5 % steady state (+2,5% 100% step load)								
Voltage Distortion	4% max for non-linear loads with crest factor of 3,5 2% max linear load								
Inverter Overload	125% for 10 minutes, 150% for 1 minute								
Phase Up to 100%	120° +3% max. displacement (unbalanced load)								
Bypass Ac Input									
Input Voltage	+10 / -15%								
Output Connection	(3ph,3/4 W + GRD)								
Frequency (Hz)	60 Hz (+0,25 Hz up to 2 Hz selectable)								
Nominal Input W/O Filter (A)	900	400	293	1,100	490	367			
Maximum Input W/O Filter (A)	1,125	500	366	1,375	613	459			
Maximum Input with filter (A)	930	400	320	1,160	500	400			
Input Breaker: Frame Size (A)	1,000(1)	1,000							
Input Breaker : Trip (A)	600			700					
Nominal Bypass Current (A)	833	361	289	1,041	451	361			
Maintenance Bypass CB and output CB:Frame size (A)	1,200								
Maintenance Bypass CB and output CB:Trip (A)	1,000								
Battery									
Max DC current	647				809				
Overall efficiency									
Non linear system efficiency:	100								
100 %	93	94	93	94	93				
75 %	91	93	94	93	94	93			
50%	91	92	93	92	91	92	93	92	
Full load heat	66,396	61,636	52,269	61,666	82,995	77,045	65,336	77,000	
Environmental Specifications									
Operating Temperature	0°C to 40°C (32° F to 104° F)								
Non-Operating	-20° C to +45° C (-4° F to 113° F)								
Audible Noise	75 dB @ 5'								
Relative Humidity	0 - 90% non-condensing								
Rejection (BTUs)									
Module Width: (75"Hx32"D) (2)	162	113	63.5	162	113	63.5	162		
(without filter)UPS Weight(lbs)	9,815	8,379	5,543	9,815	10,440	8,836	5,612	10,440	

- (1) @480 volts. Contact MGE for optional input CB at 208 volts
 (2) Input filter: 300-375 kVA add 18 inches, 480/480 only.
 (3) Call factory for details • Single Module Only





PTS For More Information:
 (866) 787-3271
 Sales@PTSdcs.com