

■ AC Power
For *Business-Critical Continuity™*

Liebert® APM™, 15-90 kVA/kW

Scalable, Highly Efficient, Row-Based UPS



MODULARITY. EFFICIENCY. FLEXIBILITY.



For More Information:
(866) 787-3271
Sales@PTSdcs.com



An Adaptable UPS That Meets Increasing Power Requirements

Prevent power interruptions and ensure the future flexibility and efficiency of your data center infrastructure, with the Liebert® APM™ UPS.

- Modular configuration
- Cost-efficient operation
- Flexibility to match increasing power demands
- Enterprise-level reliability

MODULARITY

Redundant intelligence and modular capacity ensure reliable operation.

Liebert FlexPower™ core assemblies incorporate distributed intelligence and scalable power in a common module. This technology allows configuration of a completely redundant power and control system, sized to match the capacity of the protected equipment. When power requirements change, capacity is easily added – without increasing the system footprint.

Using FlexPower core assemblies, the Liebert APM can scale from 15 to 45kW, or up to 90kW in 15kW increments within a single cabinet. This approach allows for right-sizing of the UPS, resulting in improved energy efficiency and reduced power expenditures.



FlexPower core hardware assemblies enable quick and easy capacity increases

Expand for capacity or redundancy in 15kW increments within a single cabinet – 15kW to 45kW or 90kW. No additional floor space is required

FlexPower assemblies may be added without powering down connected equipment.

Distributed controls – each FlexPower core assembly includes DSP controls, minimizing possibility of single point of failure

Standalone static bypass module – features independent controls in separate assembly to provide higher reliability

EFFICIENCY

Liebert APM offers the highest efficiency in its class, up to 94% in double conversion and up to 98% in Active Eco-mode.


It is even more efficient when sized in accordance with present system needs, instead of purchasing larger capacity systems to anticipate future requirements.

Lowest Total Cost of Ownership

- High-efficiency rating (up to 94%), with a virtually flat efficiency curve from 50-100% load, resulting in significant energy cost savings
- ENERGY STAR® qualified UPS (208V models) – UPS products meeting the EPA's requirements use an average of 35% less energy than their standard counterparts
- Buy only what you need for present usage, with the flexibility to add capacity as demand increases
- One-year warranty – provides full system coverage for one year



Liebert APM Efficiency Curve

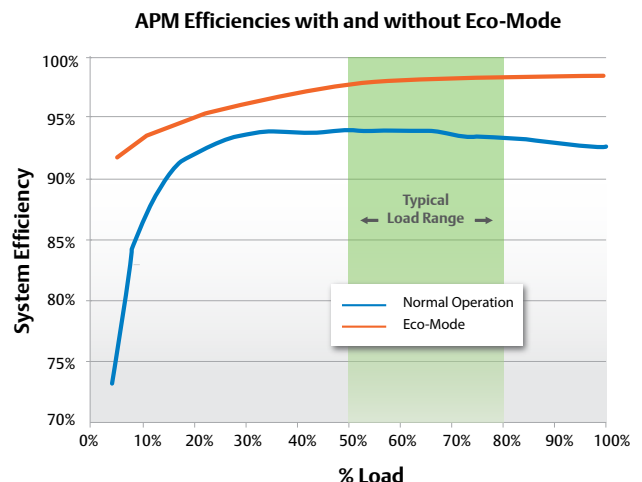

The 90kW APM UPS at full load with a 2% efficiency advantage over competitive UPS saves \$1800 annually (assuming \$0.10 per kW Hr)



An Efficient Row-based UPS with the Reliability Features of an Enterprise UPS System

FLEXIBILITY

Liebert® APM™ supports dynamic environments and IT growth with options for communications, application and growth.

Flexibility

- Capacity can be expanded in 15kW increments using FlexPower™ assemblies
- 45kW model includes internal batteries; the 90kW model uses external battery cabinets
- Easy Installation – front service access, smaller footprint
- 208V, 480V and 600V input configurations
- Matching bypass and distribution cabinet – increase reliability and safety by switching the protected load to bypass power for maintenance and service
- Top or bottom cable entry – enables installation on raised or non-raised floors



Simple and Comprehensive Monitoring

The menu-driven monitor panel on Liebert APM is large and easy to read. Multiple parameters are monitored; data is recorded, stored and easily viewable. Unit metering and status information is displayed in a logical format, and is selectable in multiple languages. The UPS also includes three Liebert IntelliSlot ports for web-based communications ability:

- Liebert IntelliSlot card IS-485EXI allows communication with Liebert SiteScan™
- Liebert IntelliSlot card IS-WEBL allows communication with Liebert Nform™
- Liebert IntelliSlot IS-IPBML offers Web Configuration, Telnet and Modbus IP for connectivity to a Building Management System
- Liebert IntelliSlot IS-485 L offers serial configuration and Modbus 485 connection to a Building Management System or Liebert SiteScan

RELIABILITY

The Liebert APM ensures reliable operation through quality components, intelligent design, and the industry's largest local support network.

Higher Availability

- Redundancy and distributed intelligence features minimize single points of failure
- Internal power supply redundancy
- Distributed controls – each FlexPower core assembly includes DSP controls, minimizing possibility of single point of failure
- Standalone static bypass module – features independent controls in separate assembly to provide higher reliability
- Parallel UPS Systems - configure for redundancy or increased capacity

Enterprise-Quality Batteries Increase Reliability

Battery quality is key to the reliability of the UPS and to the availability of the protected equipment. Liebert APM provides the same reliable battery technology that supports enterprise UPS systems.

- Lower initial cost
- Better service life
- Fewer batteries = less maintenance, fewer cells to fail
- Battery warranty – 3 years full warranty, 7 years pro-rated
- Backed by the largest service organization in the industry
- Optional Albér® BDSi in external battery cabinet ensures battery reliability by constantly monitoring each battery, allowing for proactive management

The row-based Liebert APM is ideally suited for:

- Small to medium-size data centers
- Server rooms
- Production areas
- Labs and testing facilities
- Telecommunications or process control centers

Technical Specifications – Liebert® APM™ UPS

Power Rating – kW/kVA	15, 30, 45	15, 30, 45, 60, 75, 90
Frame Size	45kW	90kW
Input AC Specifications		
Phase	3	
Power Factor	0.99 lagging minimum at full load	
Frequency Range	40-70 Hz	
Input Voltage	208, 220, 480, 600VAC, 60Hz, 3-phase, 4-wire plus ground	
General Specifications		
UPS Technology	On-Line, Double Conversion	
Battery Specifications		
Battery Test Type	Online	
Battery Technology	Valve-regulated lead acid battery; supplied by EnerSys	
Output AC Specifications		
Voltage	208/120, 220/127VAC, 60Hz 3-phase, 3- or 4-wire plus ground	
Frequency – Hz	60 Hz	
Communications		
Communications Options	Liebert IntelliSlot IS-485EXT, Liebert SiteScan, IS-WEBL, Liebert Nform	
Physical Data UPS		
Dimensions, W X D X H in (mm)	31.8 x 39.5 x 78.7 (800, 1000, 2000) Note: 12 inches of rear clearance required for cooling	
UPS Rating	Unit Weight lb (kg)	
15kW	919 (417)	705 (320)
30kW	994 (451)	780 (354)
45kW	1069 (485)	855 (388)
60kW	NA	930 (422)
75kW	NA	1005 (456)
90kW	NA	1080 (490)
Physical Data Bypass Distribution Cabinet		
Dimensions, W X D X H in (mm)	23.625 x 39.5 x 78.75 (600 x 1000 x 2000)	
Weight lb (kg)	902 (410)	
Physical Data Battery Cabinet		
Dimensions, W X D X H in (mm)	23.625 x 39.5 x 78.75 (600 x 1000 x 2000)	
Weight lb (kg)	1554 (705) with Hx150 batteries, 1693 (768) with HX205 batteries, 2101 (953) with HX300 batteries, and 2366 (1073) with HX330 batteries.	
Environmental		
Operating Temperature, °F (°C)	UPS: 32° to 104°F (0-40°C); Battery: 68° to 86°F (20-30°C)	
Relative Humidity	0% to 95%, non-condensing	
Operating Altitude	Up to 3,300 ft. (1,000m) without derating	
Acoustical Noise, db, at 39 in.	Less than 56 dBA typical, 3.3 ft. (1m) from the unit	
Agency/Certification/Conformance		
	Listed to UL 1778 and UL 924 UPS standards, and CSA certified. Meets current requirements for safe high performance UPS operation. ENERGY STAR® qualified UPS – 208V models	
Warranty		
Standard	1 Year	

Emerson Network Power
Liebert Corporation World Headquarters
 1050 Dearborn Drive
 P.O. Box 29186
 Columbus, Ohio 43229
 United States Of America
 800 877 9222 Phone (U.S. & Canada Only)
 614 888 0246 Phone (Outside U.S.)
 614 841 6022 FAX
 Contact@EmersonNetworkPower.com

Emerson Network Power
Caribbean and Latin America
 Office – United States of America
 +1-954-984-3452 Phone
 Ask.Cala@Emerson.com

liebert.com
24 x 7 Tech Support
 800 222 5877 Phone
 614 841 6755 (outside U.S.)

Emerson Network Power.
 The global leader in enabling
Business-Critical Continuity™.

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2013 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names and logos referred to herein are trade names, trademarks or registered trademarks of their respective owners. ® Liebert is a registered trademark of the Liebert Corporation.

SL-25600 (R06/13) Printed in USA

Business-Critical Continuity. Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
 ©2013 Emerson Electric Co.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Industrial Power
- Infrastructure Management & Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services

EmersonNetworkPower.com

Business-Critical Continuity. Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2013 Emerson Electric Co.



For More Information:
 (866) 787-3271
 Sales@PTSdcs.com